




GRID360 

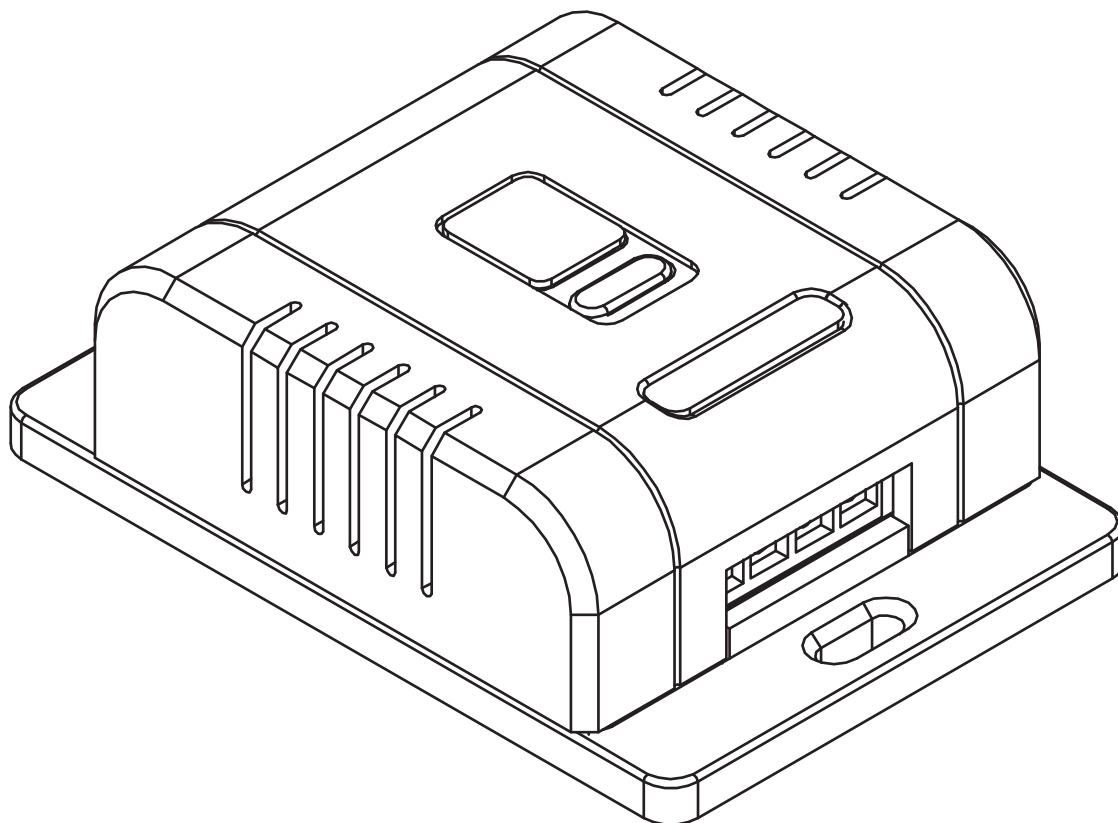

User Manual

for Kinetic Wall Switch Dimmer Receivers

Product Range: SKIN-4

to work with GRID360 On-Off Kinetic Switch Range


Important note: Isolate power before connecting receiver. Failure to do so can cause electric shock, fire or other hazards.

CE UK RoHS




v1.0.2

A. What is in the box ?

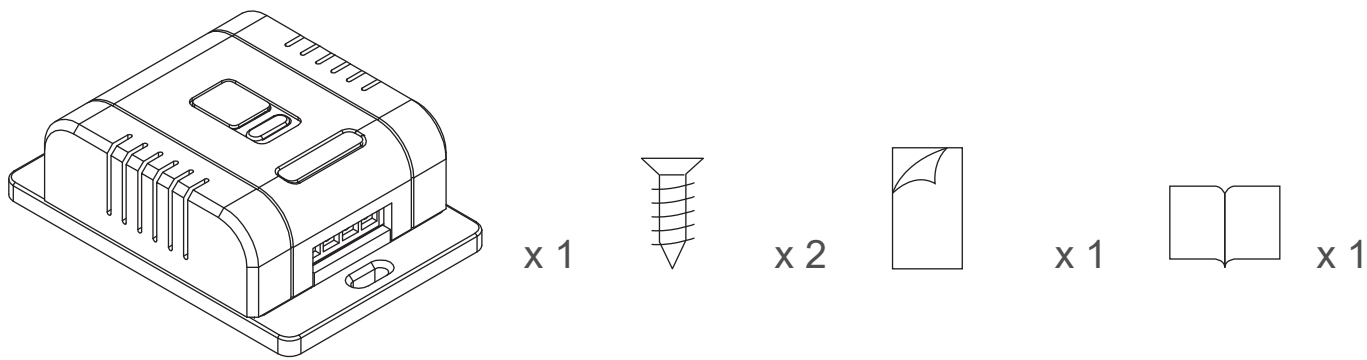

B. Specification

Dimensions:

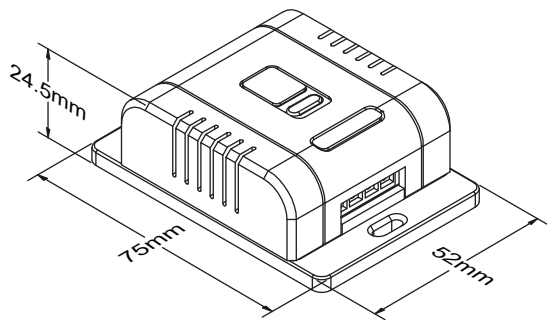

Product Code:

SKIN-4

Dimming:

Trailing Edge

Compatible Switch:

GRID360 On-Off

Kinetic Switch

Power:

100W LED; 200W Resistive Loads

Input Voltage:

AC220~240V 50/60Hz



Radio Frequency:

RF 433MHz & 2.4G for Smart Versions.


IP Rating:

IP20; Indoor use only.

C. Functions of parts

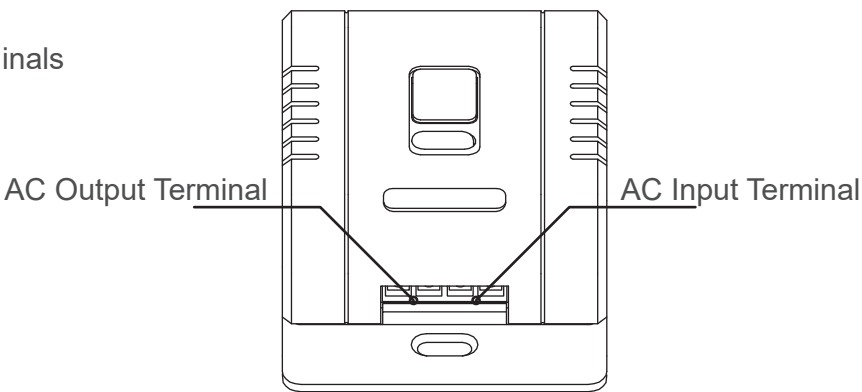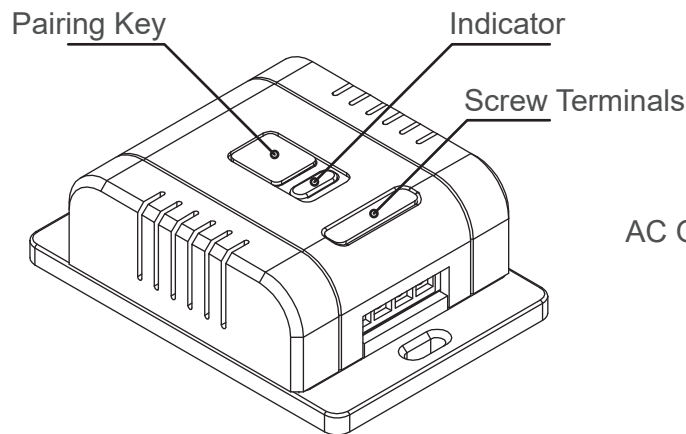

D. Wiring Diagram

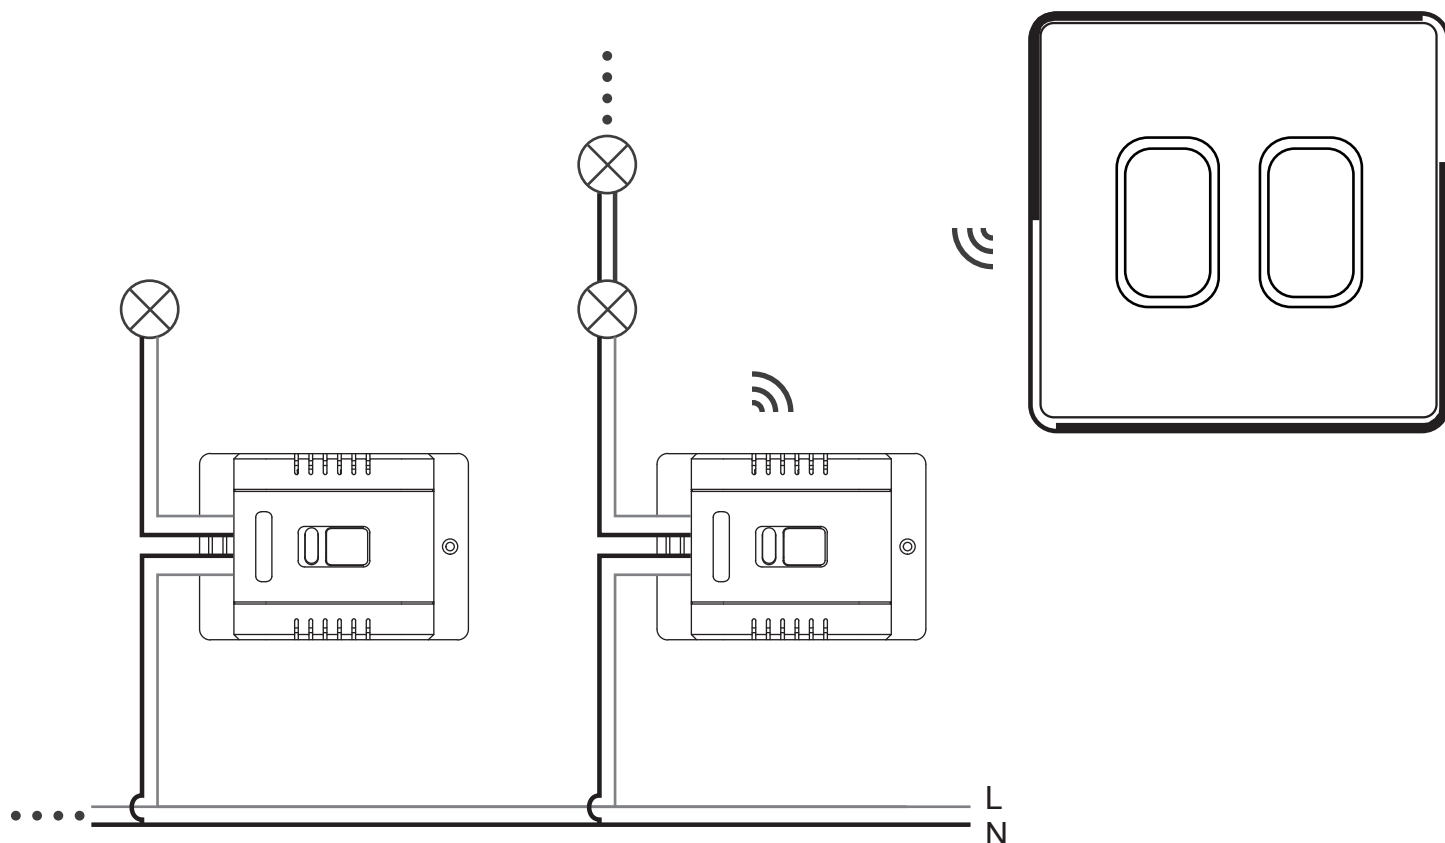


E. Installation


- (a) Disconnect the mains before installation.



Installation must be carried out by licensed electricians.




- (c) Press the Pairing Key to pair to switches.

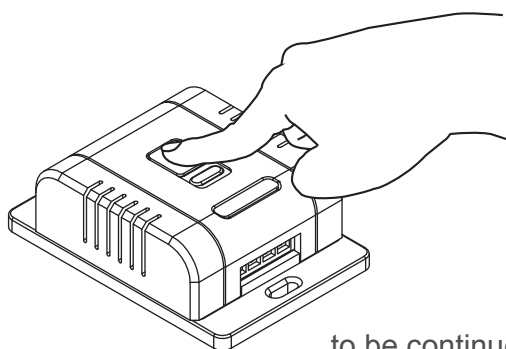


to be continued
in Pairing section.

- (b) Fix the cables to the receiver firmly.

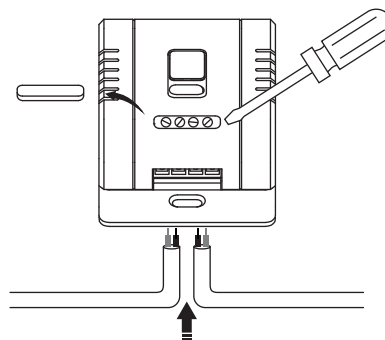

- (d) Fix the receiver by screws or sticker provided.

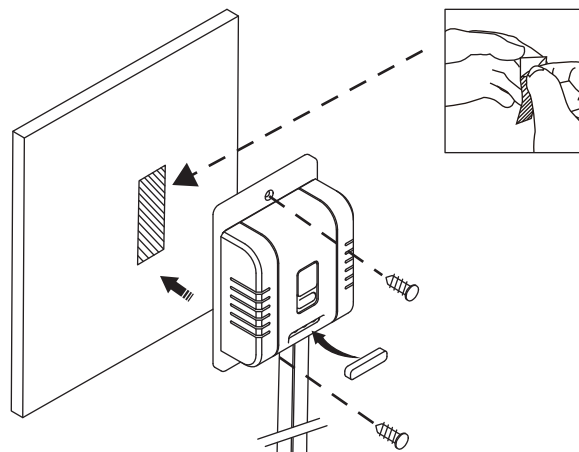


F. Pairing

1. For RF Pairing




Reset Pairings:

RF - Long press the pairing key for 6-7s;
App - Long press the pairing key for 10-12s.

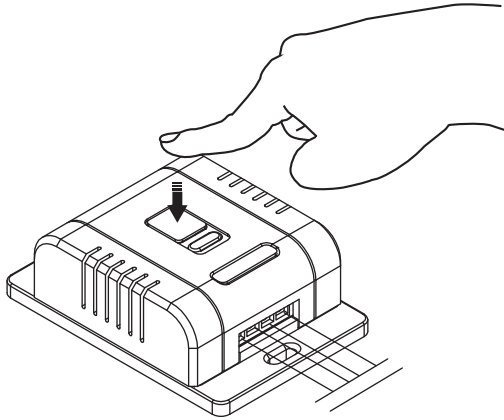

Press the Pairing Key for 3-4s,
until the RED indicator flash slowly.

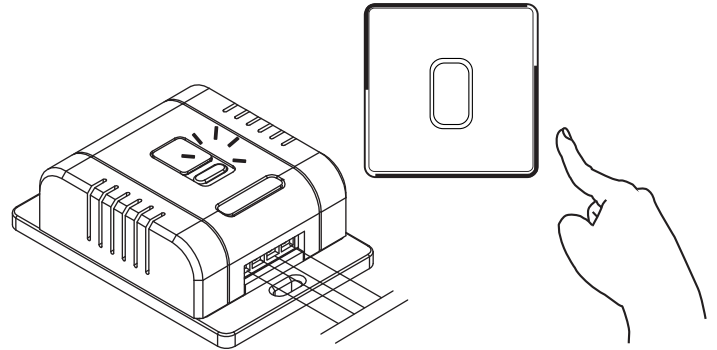


While the indicator on receiver flashes, press the
Kinetic switch ONCE to complete the pairing.

2. For App Pairing

(a) Download Tuya Smartlife App to process:




(b) Press 10-12s to activate App pairing on receiver:

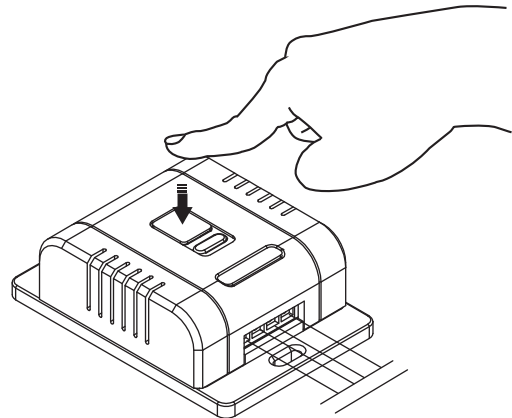


Press the Pairing Key for 10-12s,
until the Red indicator changes into Blue light.

(a) Add the Dimmer receiver to Tuya App
to complete pairing:

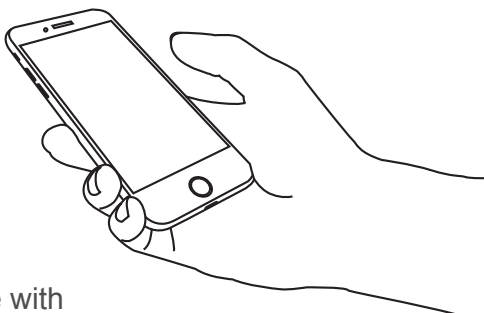


continue with
Tuya User Manual.....

(b) Please note, 5G Router is NOT compatible.



WiFi 2.4G



G. Pairing Limitations

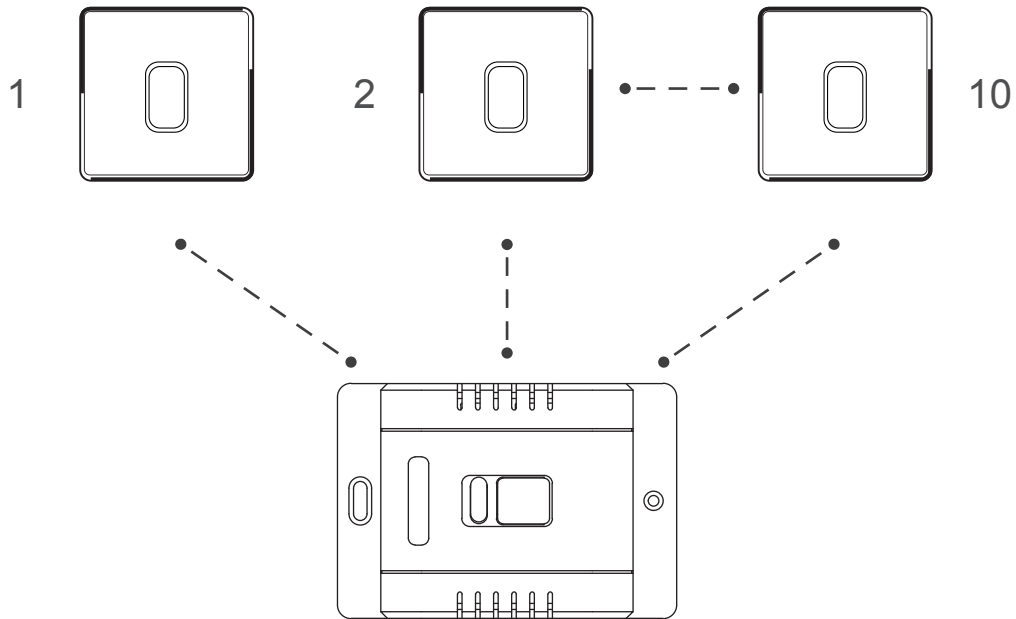

Max. 10 Kinetic Switches to pair ONE Dimmer Receiver.

To avoid sync problem, we DO NOT suggest to pair multiple dimmer receivers to one or multiple Kinetic Switches.

H. Control the Dimmer via Kinetic Switch

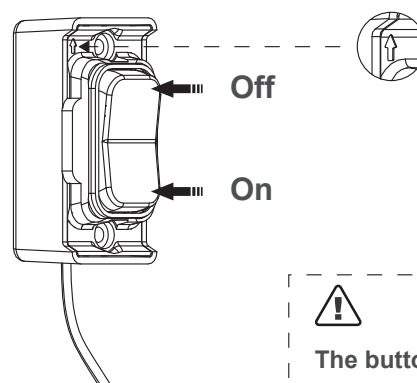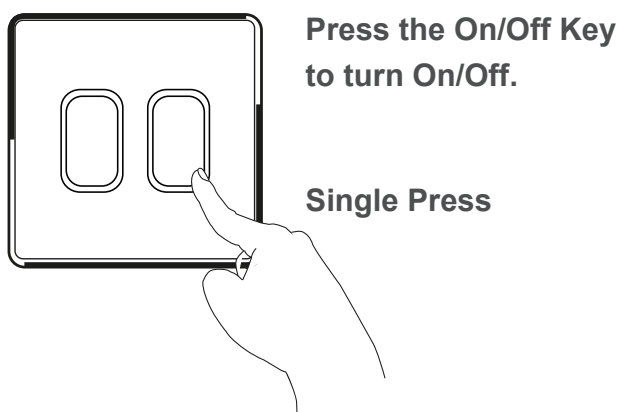


The button on the Upper Arrow side is the Off key.



To set the brightness level, please use the App to do so. The Grid360 On-Off Kinetic switches only provide On/Off function.

For better dimming performance, please set the Min. and Max. brightness range for the dimmer on Tuya App. Follow the Tuya User Manual to do so.

I. Control the Dimmer via Tuya App

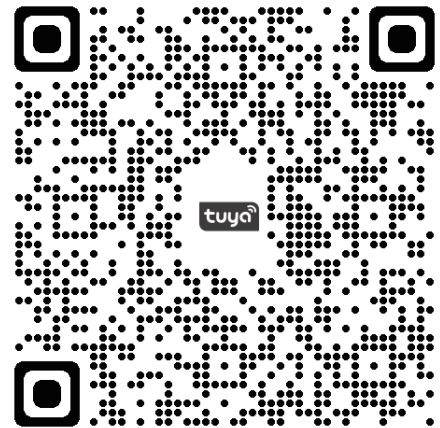

Follow Tuya App User Manual for better experience.


Scan the QR code to Tuya User Manual.

J. Attention



Do not cover with insulation.

d = Min. 50mm


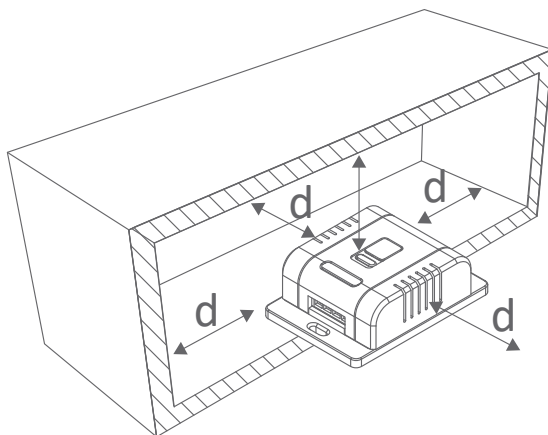


Disposal Information

Should you want to dispose of this item please do not put it with the household waste. Used electrical and electronic equipment and batteries must be made available for separate collection. Electrical products may contain toxic materials such as lead or cadmium. Separate collection allows materials to be recovered and recycled. Private households may return their used electrical and electronic equipment to designated collection facilities free of charge. Facilities are usually available at the municipal waste site, your electrical retailer, or your local authority may provide separate collection from the household. By disposing of this product correctly you will be providing positive help to the environment.



LGA Europe Ltd,
T/A Selectric,
Cow Lane, Oldfield Road,
Salford, M5 4NB, UK
www.selectricuk.co.uk



SAFETY FIRST

- BEFORE STARTING ANY ELECTRICAL WORK ALWAYS SWITCH OFF AT THE MAINS
- IF IN DOUBT CONSULT A QUALIFIED ELECTRICIAN

Get Switched On