



Data Sheet

LG304

- 6 Way Booster Box with Digital Bypass & Circuit Protection
- Designed to ensure the transfer of superior quality digital signals between all your home entertainment systems
- Booster has a built-in short circuit protection on each individual output
- With integrated by-pass, designed to allow the user to control SKY™ digital receivers from a second TV without additional equipment apart from a Link device and a SKY™ or compatible universal remote control
- For indoor use only

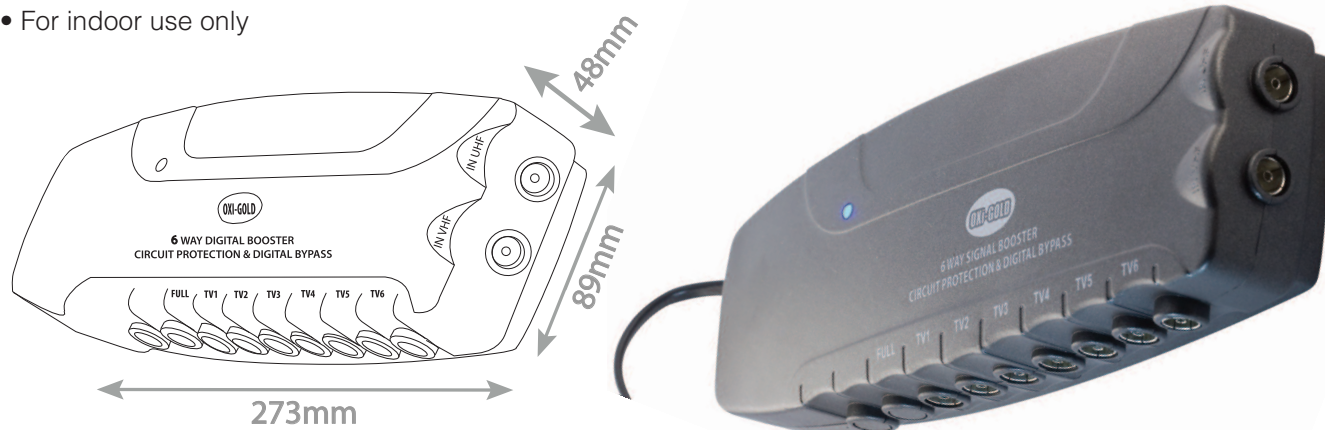

| | |
|------------------------------|---|
| Code | LG304 |
| Description | 6 Way Booster Box with Digital Bypass & Circuit Protection |
| Size | 273mm (W) x 89mm (H) x 48mm (D) |
| Range | Selectric OXi-GOLD - Audio, Visual & Digital Accessories |
| Colour | Black |
| Material | Fire Retardant ABS Body (Acrylonitrile Butadiene Styrene) |
| Included | Instructions & fixing kit |
| Weight | 0.640kg |
| Inner Carton Quantity | 1 |
| Inner Carton Weight | 0.720kg |
| Barcode | 5025117986806 |
| Commodity Code | 852910 |
| Standards | BS 3041-7, EN 55013, EN 55020 & EN 61000-3 |
| Notes | <ul style="list-style-type: none"> • Link up to 6 additional TV sets • Complete with fitted 1M power cable & 3 amp tough plug • For indoor use only and should be used in accordance with the instructions provided • CE Marked |

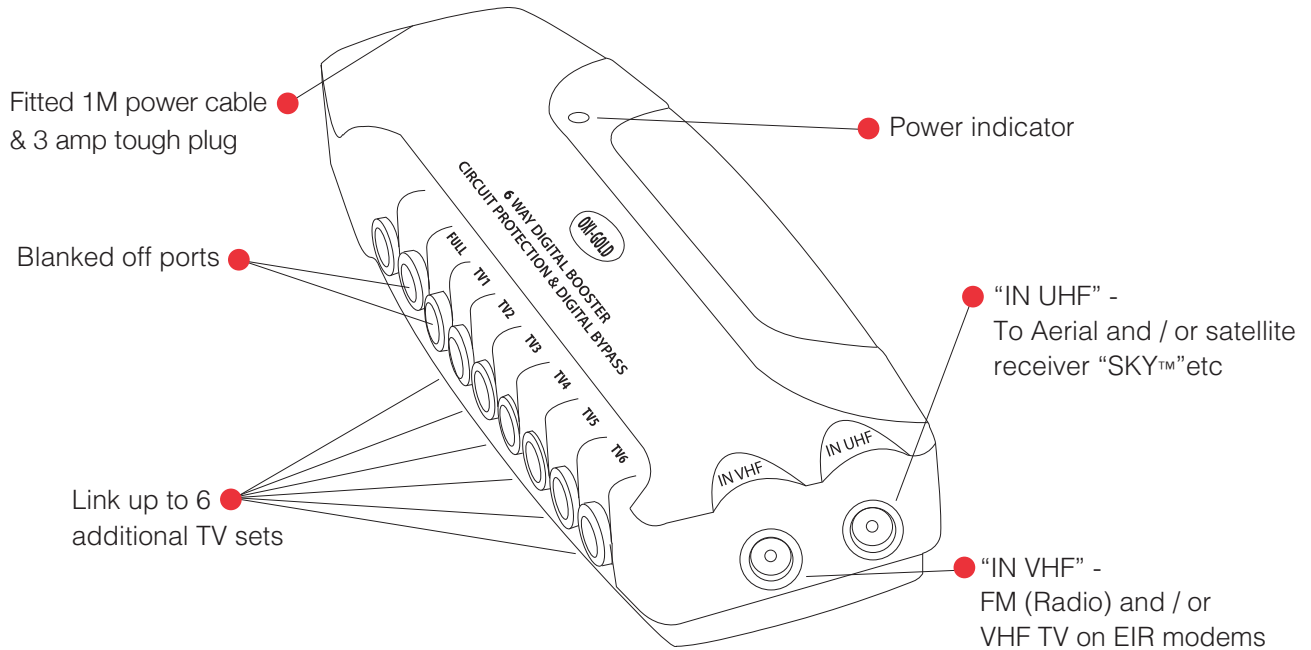

| | |
|---------------------------------|---|
| Frequency | VHF 47-230MHz - UHF 470-860MHz - FM 88-108MHz |
| Gain - Full Output | 15dB |
| Gain - Per Port | 12-15dB |
| Noise | < =3.5dB |
| Isolation Loss | 23dB |
| Impedence | 75Ω |
| Voltage | 220-240V |
| Line Power | 12V 25mA |
| Hertz | 50Hz |
| Rated Power | 3.5 Watt |
| Wall / Surface Mounting? | Yes - Mounting Holes: 124mm apart |
| Suspended Mounting? | No |
| Ceiling Mounting? | No |
| Built-in Mounting? | No |