
Data Sheet:

DSL688



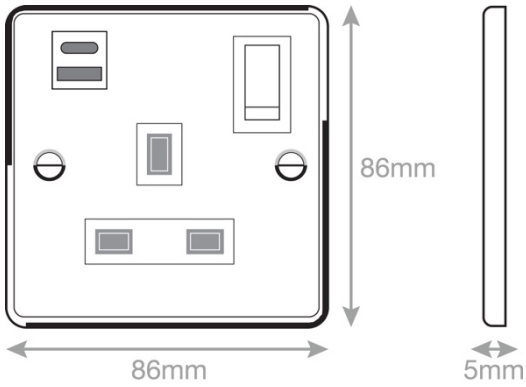

Code:	DSL688
Description:	13 Amp USB Socket Outlet - 1 Gang Switched with 1 x USB Type C & 1 x USB Type A Port (3.1A)
Range:	Selectric 5M
Colour:	Antique brass, black insert
Ingress Protection:	IP20
Material:	Premium grade steel
Included:	M3.5 fixing screws & wiring instructions
Weight:	0.19kg
Inner Carton Quantity:	10
Inner Carton Weight:	1.9kg
Guarantee:	5 year plate guarantee
Barcode:	5025117029978
Commodity Code:	8536 699099
Standards:	BS 1363-2:2023, EN IEC 62368-1:2024+A11:2024, EN IEC 61000-6-1:2019, EN IEC 61000-6-3:2021
Packaging:	Poly Bag with Euro Slot
Notes:	• USB C output 3A, USB A output 2.4A, Total combined output 3.1A • Works normally with 180–275 V AC input and up to 15.5W total output. If one or both USB ports exceed 15.5 W, the power supply will stop working • Overload protection shuts off output if the connected device draws too much power • Fault protection automatically cuts power during abnormal conditions and resets itself once the issue is removed • Thermal protection prevents overheating • Power socket for standard UK 3 pin plug

Selectric reserves the right to withdraw, improve, or modify any design without prior notification.
Selectric cannot be held responsible for the incorrect application / installation of any product.

LGA Europe Ltd T/A Selectric, Cow Lane, Oldfield Road, Salford, M5 4NB Tel: 0161 745 7777 Fax: 0161 745 2777
Email: sales@selectricuk.co.uk Website: www.selectricuk.co.uk