


# Data Sheet : SSRI-25A

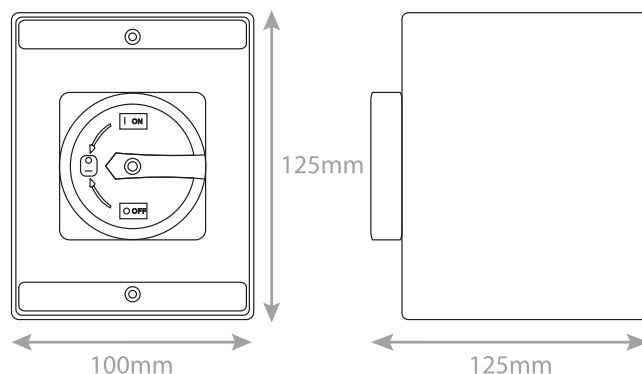

|                              |   |
|------------------------------|---|
| <b>Code</b>                  | SSRI-25A  |
| <b>Description</b>           | IP65 Rated 25 Amp / 12.5kW Weatherproof Rotary Isolator Switch - 4 Pole - 415V - Grey   |
| <b>Size</b>                  | 100mm (W) x 125mm (H) x 120mm (D)   |
| <b>Range</b>                 | Selectric Seal - IP65 to IP68 Rated Accessories   |
| <b>Colour</b>                | Grey, yellow & red  |
| <b>Knockouts?</b>            | 4 x knock-out cable entries - 2 top + 2 bottom (20mm or 25mm)   |
| <b>Wall Mountable?</b>       | Yes   |
| <b>Lockable?</b>             | Lockable in OFF position  |
| <b>Amps / kW</b>             | 25 Amp - 12.5kW   |
| <b>IP Rating</b>             | IP65  |
| <b>Included</b>              | Instructions  |
| <b>Weight</b>                | 0.45kg  |
| <b>Inner Carton Quantity</b> | 1   |
| <b>Barcode</b>               | 5025117987162   |
| <b>Standards</b>             | BS EN 60947-3   |
| <b>Notes</b>                 | <ul style="list-style-type: none"> <li>• On load switch disconnectors</li> <li>• Surface mounting with polycarbonate housing</li> <li>• The impact resistant base and cover will survive the hardest knocks in almost any installation</li> <li>• The two sections are sealed with a weather seal gasket</li> <li>• Heavy duty &amp; weatherproof, for indoor or outdoor use</li> <li>• IP65 – Protected against dust that may harm equipment.<br/>Protected against water spray from all directions</li> </ul> |