


Data Sheet:
DSL861



Code:	DSL861
Description:	13 Amp Socket Outlets - 2 Gang Switched SP with 2 x USB Type A Ports (2.1A / 1A)
Range:	Selectric 5M
Colour:	Satin brass, black insert
Ingress Protection:	IP20
Material:	Premium grade steel
Included:	M3.5 fixing screws & wiring instructions
Weight:	0.31kg
Inner Carton Quantity:	5
Inner Carton Weight:	1.55kg
Guarantee:	5 year plate guarantee
Barcode:	5025117024027
Commodity Code:	8536 699099
Standards:	BS 1363-2:2016+A1:2018, EN IEC 62368-1:2020+A11:2020, EN IEC 62680-1-1, EN IEC 61000-6-1:2019, EN IEC 61000-6-3:2021
Packaging:	Box with sleeve & euro slot
Notes:	<ul style="list-style-type: none"> • USB output – 2.1 Amp / 1 Amp (3.1 Amp total) • If one or both USB ports exceed 15.5W, the power supply will stop working • Overload protection shuts off output if the connected device draws too much power • Fault protection automatically cuts power during abnormal conditions and resets itself once the issue is removed • Thermal protection prevents overheating • 2 Earth terminals for safe installation

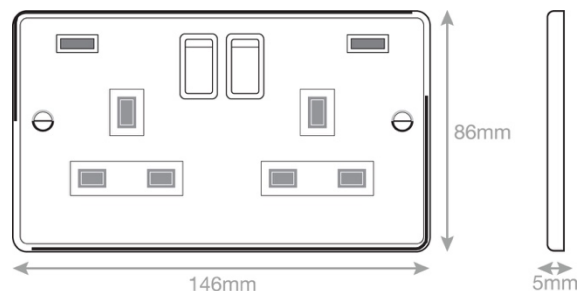

Selectric reserves the right to withdraw, improve, or modify any design without prior notification.
 Selectric cannot be held responsible for the incorrect application / installation of any product.