
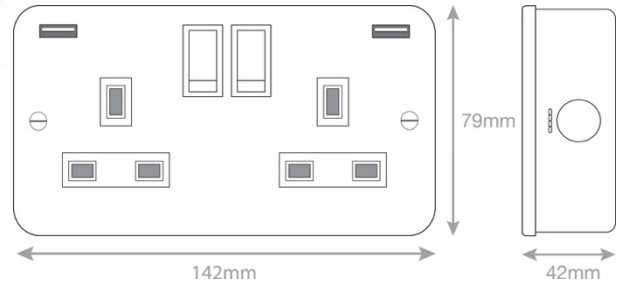


LG9098MB-USB

Code:	LG9098MB-USB
Description:	13 Amp USB Socket Outlets - 2 Gang Switched SP, 2 Earth Terminals with 2 x USB Type A Ports (2.1A / 1A)
Range:	Selectric Metal Clad
Colour:	Grey with white insert
Ingress Protection:	IP20
Material:	High grade steel with aluminium epoxy powder coating
Included:	M3.5 fixing screws & back box
Weight:	0.49kg
Inner Carton Quantity:	5
Inner Carton Weight:	2.45kg
Guarantee:	15 years
Barcode:	5025117004760
Commodity Code:	8536 699099
Standards:	BS 1363-2:2016+A1:2018 EN IEC 62368-1:2020+A11:2020, EN IEC 62680-1-1, EN IEC 61000-6-1:2019, EN IEC 61000-6-3:2021
Packaging:	Colour box with Euro Slot
ASTA Approval:	No
Notes:	<ul style="list-style-type: none"> • Installed Dynamic Device Recognition • USB output – 2.1 Amp / 1 Amp (3.1 Amp total) • If one or both USB ports exceed 15.5W, the power supply will stop working • Overload protection shuts off output if the connected device draws too much power • Fault protection automatically cuts power during abnormal conditions and resets itself once the issue is removed • Thermal protection prevents overheating • Surface mounting box included

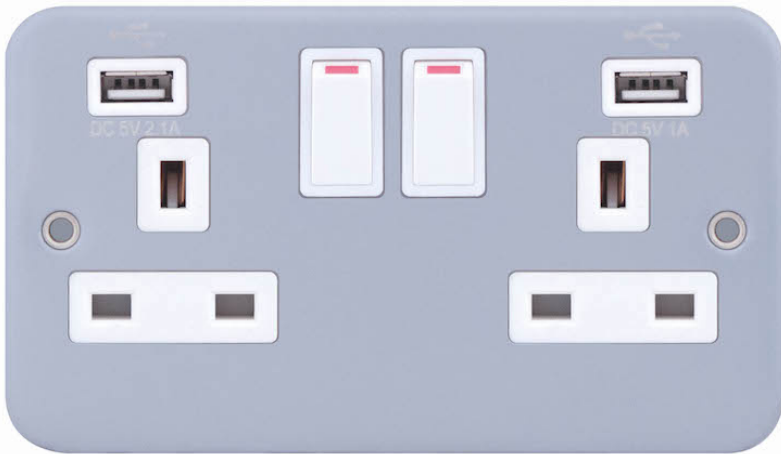

Selectric reserves the right to withdraw, improve, or modify any design without prior notification.
Selectric cannot be held responsible for the incorrect application / installation of any product.