



Data Sheet: LGRCD-2

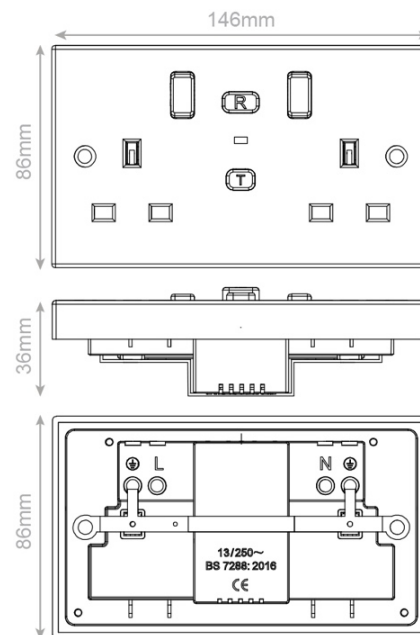

Code:	LGRCD-2
Description:	13 Amp RCD Protected 2 Gang DP Switched Socket
Range:	Selectric Square
Colour:	White
Ingress Protection:	IP20
Operating Model:	Passive / latching
Tripping Type:	Type A
Material:	Polycarbonate alloy
Included:	Instructions
Weight:	0.198kg
Inner Carton Quantity:	5
Inner Carton Weight:	0.99kg
Guarantee:	1 Year
Barcode:	5025117028667
Commodity Code:	8536 699099
Standards:	BS 1363-2, BS EN 61543 & BS 7288
Packaging:	Poly Bag with Euro Slot
Notes:	<ul style="list-style-type: none"> • 30mA Trip • Passive / latching; RCD will remain closed once set, and will only trip when a hazardous earth fault occurs • Rated tripping current: 30mA • Rated tripping time: 40mS • Captive screws • Minimum Box depth: 35mm • Designed to operate between -5°C and 40°C with an average value not exceeding 35°C measured over a 24hr period, & an altitude no greater than 2000m above sea level

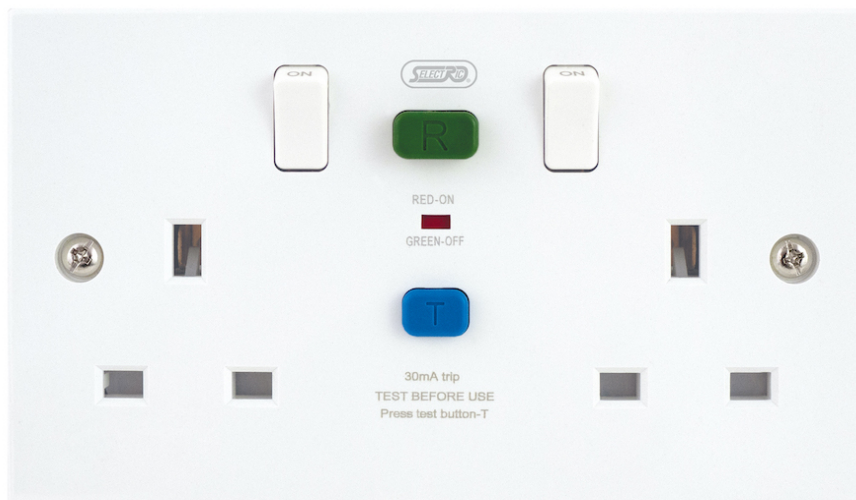

Selectric reserves the right to withdraw, improve, or modify any design without prior notification.
Selectric cannot be held responsible for the incorrect application / installation of any product.