



Data Sheet:
SSL580

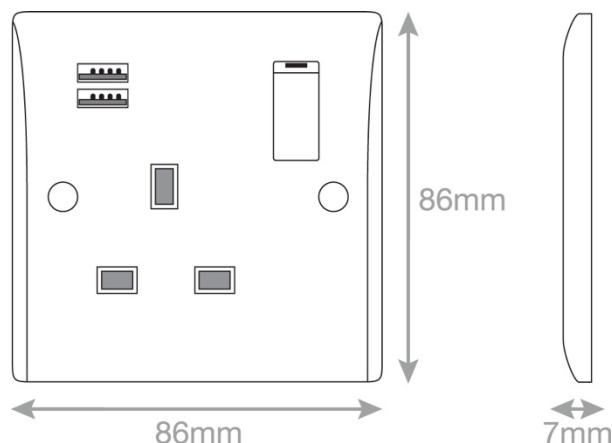

| | |
|-------------------------------|---|
| Code: | SSL580 |
| Description: | 13 Amp USB Socket Outlets – 1 Gang Switched with 2 x USB Type A Ports (1A / 1A) |
| Range: | Selectric Smooth |
| Colour: | White |
| Ingress Protection: | IP20 |
| Material: | Bakelite |
| Included: | M3.5 fixing screws & screw cap covers |
| Weight: | 0.21kg |
| Inner Carton Quantity: | 10 |
| Inner Carton Weight: | 2.1kg |
| Guarantee: | 5 years |
| Barcode: | 5025117004715 |
| Commodity Code: | 8536 699099 |
| Standards: | BS 1363-2:2016+A1:2018 EN IEC 62368-1:2020+A11:2020, EN IEC 62680-1-1, EN IEC 61000-6-1:2019, EN IEC 61000-6-3:2021 |
| Packaging: | Poly Bag with Euro Slot |
| ASTA Approval: | No |
| Notes: | <ul style="list-style-type: none"> • Antimicrobial certified • USB output – DC 5V 1 Amp (total output 2.1A) • If one or both USB ports exceed 10.5W, the power supply will stop working • Overload protection shuts off output if the connected device draws too much power • Fault protection automatically cuts power during abnormal conditions and resets itself once the issue is removed • Thermal protection prevents overheating • 0.3A 50Hz +/- 3Hz |

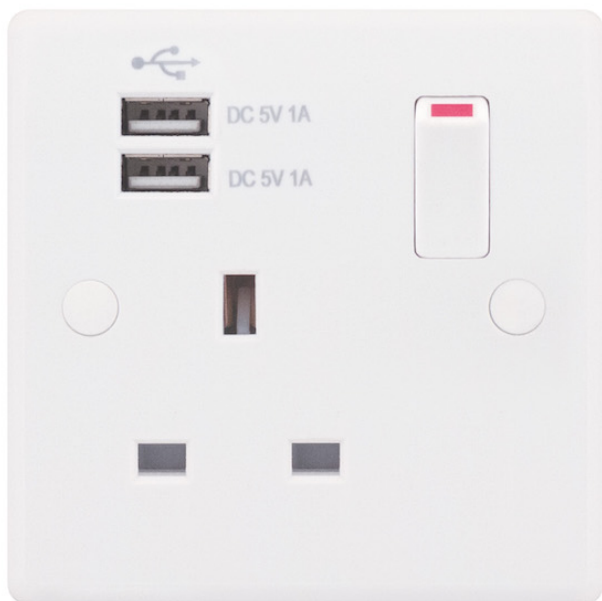

Selectric reserves the right to withdraw, improve, or modify any design without prior notification.
 Selectric cannot be held responsible for the incorrect application / installation of any product.