



Data Sheet:  
**SSL649**

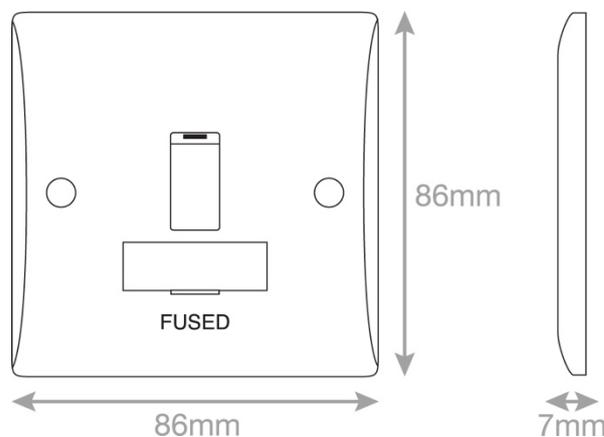

<b>Code:</b>	SSL649
<b>Description:</b>	3A DP Switched Fused Connection Unit
<b>Range:</b>	Selectric Smooth
<b>Colour:</b>	Red
<b>Ingress Protection:</b>	IP20
<b>Material:</b>	Bakelite
<b>Included:</b>	M3.5 fixing screws & screw cap covers
<b>Weight:</b>	0.13kg
<b>Inner Carton Quantity:</b>	10
<b>Inner Carton Weight:</b>	1.3 kg
<b>Guarantee:</b>	30 years
<b>Barcode:</b>	5025117027059
<b>Commodity Code:</b>	8536 109090
<b>Standards:</b>	BS 1363-4
<b>Packaging:</b>	Poly Bag with Euro Slot
<b>ASTA Approval:</b>	No
<b>Notes:</b>	<ul style="list-style-type: none"> <li>• Antimicrobial certified</li> <li>• A Fused Spur or Connection Unit is commonly used for powerful electrical appliances, such as washing machines, hand dryers etc, that need to be installed without a plug. They are also used for electrical items that need to be installed on a separate cable from the ring main, for safety and maintenance purposes</li> <li>• Minimum back box size required: 25mm depth</li> </ul>

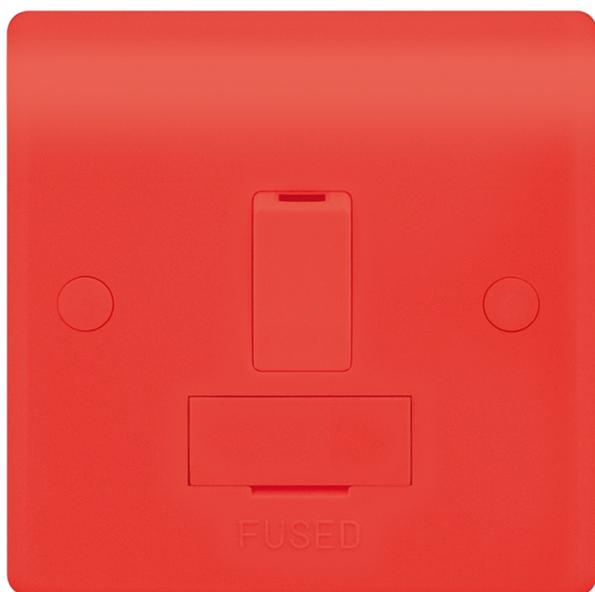

Selectric reserves the right to withdraw, improve, or modify any design without prior notification.  
 Selectric cannot be held responsible for the incorrect application / installation of any product.