Data Sheet

LG303



- 4 Way Booster Box with Digital Bypass & Circuit Protection
- Designed to ensure the transfer of superior quality digital signals between all your home entertainment systems
- Booster has a built-in short circuit protection on each individual output
- With integrated by-pass, designed to allow the user to control SKYTM digital receivers from a second TV without additional equipment apart from a Link device and a SKYTM or compatible universal remote control




| Code | LG303 |
|-----------------------|---|
| Description | 4 Way Booster Box with Digital Bypass & Circuit Protection |
| Size | 177mm (W) x 85mm (H) x 46mm (D) |
| Range | Selectric OXi-GOLD - Audio, Visual & Digital Accessories |
| Colour | Black |
| Material | Fire Retardant ABS Body (Acrylonitrile Butadiene Styrene) |
| Included | Instructions & fixing kit |
| Weight | 0.475kg |
| Inner Carton Quantity | 1 |
| Inner Carton Weight | 0.530kg |
| Barcode | 5025117986790 |
| Commodity Code | 852910 |
| Standards | BS 3041-7, EN 55013, EN 55020 & EN 61000-3 |
| Notes | Link up to 4 additional TV sets Complete with fitted 1M power cable & 3 amp tough plug For indoor use only and should be used in accordance with the instructions provided CE Marked |

Data Sheet

LG303



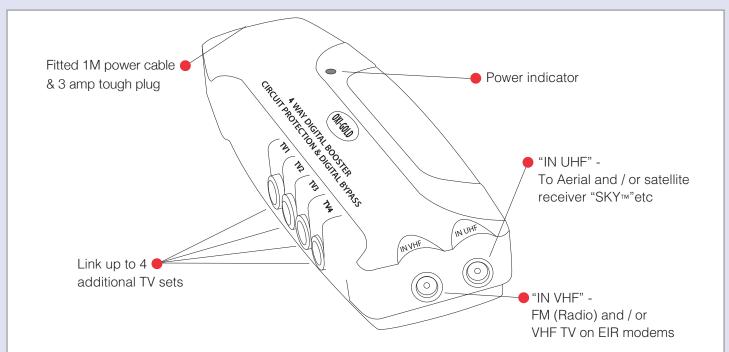

| Frequency | VHF 47-230MHz - UHF 470-860MHz - FM 88-108MHz |
|--------------------------|---|
| Gain - Full Output | 12dB |
| Gain - Per Port | 9-12dB |
| Noise | <=3.5dB |
| Isolation Loss | 23dB |
| Impedence | 75Ω |
| Voltage | 220-240V |
| Line Power | 12V 25mA |
| Hertz | 50Hz |
| Rated Power | 3.5 Watt |
| Wall / Surface Mounting? | Yes - Mounting Holes: 74mm apart |
| Suspended Mounting? | No |
| Ceiling Mounting? | No |
| Built-in Mounting? | No |